

# Lamp controlgear —

## Part 2-12: Particular requirements for d.c. or a.c. supplied electronic ballasts for discharge lamps (excluding fluorescent lamps)

The European Standard EN 61347-2-12:2005 has the status of a  
British Standard

ICS 29.140.99

## National foreword

This British Standard is the official English language version of EN 61347-2-12:2005. It is identical with IEC 61347-2-12:2005.

The UK participation in its preparation was entrusted by Technical Committee CPL/34, Lamps and related equipment, to Subcommittee CPL/34/3, Auxiliaries for lamps, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

### Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 22, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

### Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 13 February 2006

© BSI 13 February 2006

EUROPEAN STANDARD

**EN 61347-2-12**

NORME EUROPÉENNE

EUROPÄISCHE NORM

October 2005

---

ICS 29.140.99

English version

**Lamp controlgear**  
**Part 2-12: Particular requirements for d.c. or a.c. supplied**  
**electronic ballasts for discharge lamps**  
**(excluding fluorescent lamps)**  
(IEC 61347-2-12:2005)

Appareillages de lampes  
Partie 2-12: Exigences particulières  
pour les ballasts électroniques alimentés  
en courant continu ou alternatif  
pour lampes à décharge  
(à l'exclusion des lampes fluorescentes)  
(CEI 61347-2-12:2005)

Geräte für Lampen  
Teil 2-12: Besondere Anforderungen  
an gleich- oder wechselstromversorgte  
elektronische Vorschaltgeräte  
für Entladungslampen  
(ausgenommen Leuchtstofflampen)  
(IEC 61347-2-12:2005)

This European Standard was approved by CENELEC on 2005-10-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Central Secretariat: rue de Stassart 35, B - 1050 Brussels**

---

## Foreword

The text of document 34C/683/FDIS, future edition 1 of IEC 61347-2-12, prepared by SC 34C, Auxiliaries for lamps, of IEC TC 34, Lamps and related equipment, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61347-2-12 on 2005-10-01.

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2006-07-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 2008-10-01

This standard shall be used in conjunction with EN 61347-1:2001

NOTE In this standard, the following print types are used:

- requirements proper: in roman type;
- *test specifications: in italic type;*
- notes: in small roman type.

Annex ZA has been added by CENELEC.

---

## Endorsement notice

The text of the International Standard IEC 61347-2-12:2005 was approved by CENELEC as a European Standard without any modification.

---

## CONTENTS

INTRODUCTION .....	4
1 Scope .....	5
2 Normative references .....	5
3 Definitions .....	5
4 General requirements .....	6
5 General notes on tests .....	6
6 Classification .....	6
7 Marking .....	7
8 Terminals .....	7
9 Provisions for earthing .....	7
10 Protection against accidental contact with live parts .....	8
11 Moisture resistance and insulation .....	8
12 Electric strength .....	8
13 Thermal endurance test for windings .....	8
14 Fault conditions .....	8
15 Protection of associated components .....	8
16 Ignition voltage .....	8
17 Abnormal conditions .....	9
18 Construction .....	11
19 Creepage distances and clearances .....	11
20 Screws, current-carrying parts and connections .....	11
21 Resistance to heat, fire and tracking .....	11
22 Resistance to corrosion .....	11
Annex A (normative) Test to establish whether a conductive part is a live part which may cause an electric shock .....	12
Annex B (normative) Particular requirements for thermally protected lamp controlgear .....	13
Annex C (normative) Particular requirements for electronic lamp controlgear with means of protection against overheating .....	14
Annex D (normative) Information for carrying out the heating tests of thermally protected lamp controlgear .....	15
Annex E (normative) The use of constants S other than 4 500 in $t_w$ tests .....	16
Annex F (normative) Draught-proof enclosure .....	17
Annex G (normative) Explanation of the derivation of the values of pulse voltages .....	18
Annex H (normative) Tests .....	19
Annex I (normative) Precautions to be observed when measuring with spherical spark gaps .....	20
Annex ZA (normative) Normative references to international publications with their corresponding European publications .....	22
Bibliography .....	21

## INTRODUCTION

This standard, and the parts which make up IEC 61347-1, in referring to any of the clauses of IEC 61347-1 specify the extent to which such a clause is applicable and the order in which the tests are to be performed; they also include additional requirements as necessary. All parts which make up IEC 61347-2 are self-contained and therefore do not include references to each other.

Where the requirements of any of the clauses of IEC 61347-1 are referred to in this standard by the phrase “The requirements of Clause n of IEC 61347-1 apply, this phrase is interpreted as meaning that all requirements of the clause in question of Part 1 apply, except any which are clearly inapplicable to the specific type of lamp controlgear covered by this particular part of IEC 61347-2.

## LAMP CONTROLGEAR –

### Part 2-12: Particular requirements for d.c. or a.c. supplied electronic ballasts for discharge lamps (excluding fluorescent lamps)

#### 1 Scope

This part of IEC 61347 specifies particular general and safety requirements for d.c. or a.c. supplied electronic ballasts. The supply comprises a.c. voltages up to 1000 V at 50 Hz/60 Hz. The type of ballast is an converter that may contain igniting and stabilising elements for operation of a discharge lamp at d.c. or at a frequency that can deviate from the supply frequency. The lamps associated with the ballast are specified in IEC 60188 (High pressure mercury vapour lamps), IEC 60192 (Low pressure sodium vapour lamps), IEC 60662 (High pressure sodium vapour lamps), IEC 61167 (Metal halide lamps) and else for general purpose lighting. Ballasts for fluorescent lamps and for lamps for special applications like for theatre and for vehicles are excluded.

#### 2 Normative references

For the purpose of this part of IEC 61347, the normative references given in Clause 2 of IEC 61347-1 apply together with the following:

IEC 60052:2002, *Voltage measurement by means of standard air gaps*

IEC 60417-DB<sup>1)</sup>, *Graphical symbols for use on equipment*

IEC 61347-1, *Lamp controlgear – Part 1: General and safety requirements*

#### 3 Definitions

For the purpose of this part of IEC 61347, the definitions given in Cause 3 of IEC 61347-1 apply together with the following:

##### 3.1

##### **output power**

value of the mean power intended to be provided by an electronic ballast

##### 3.2

##### **output terminals**

ballast terminals, intended to be connected to the HID lamp

NOTE This terminal is not understood as a terminal allowing for intermediate operation of e.g. tungsten halogen lamps.

---

<sup>1)</sup> “DB” refers to the IEC on-line database.

### 3.3

#### ignition voltage

$U_p$

highest value of the voltage generated between the output terminals

NOTE 1 Basically, the following types of pulses are comprised:

- a) continuous r.m.s. working voltage with superimposed non-sinusoidal single pulse;
- b) continuous sinusoidal pulse voltage;
- c) continuous sinusoidal pulse voltage with superimposed non-sinusoidal single pulse;
- d) continuous square wave voltage with ringing sinusoidal voltage at each transition.

NOTE 2 The term 'pulse' is to be distinguished from the term 'surge' which refers to transients occurring in electrical equipment or networks in service.

### 3.4

#### spherical spark gap

two metal spheres of the same nominal diameter arranged at a specified distance and used under specified conditions for the measurement of peak voltages in excess of 15 kV

## 4 General requirements

The requirements of Clause 4 of IEC 61347-1 apply.

## 5 General notes on tests

The requirements of Clause 5 of IEC 61347-1 apply together with the following additional requirements:

### 5.1 Number of specimens

The following number of specimens shall be submitted for testing:

- one unit for the tests of Clauses 6 to 12 and 15 to 22;
- one unit for the tests of Clause 14: fault conditions (additional units or components, where necessary, may be required in consultation with the manufacturer).

5.2 Void.

## 6 Classification

The requirements of Clause 6 of IEC 61347-1 apply together with the following additional requirement:

### 6.1 Ignition voltage

Ballasts are classified according to ignition voltage:

- up to and including 5 kV;
- greater than 5 kV, and up to and including 10 kV;
- greater than 10 kV, and up to and including 100 kV.

6.2 Void.

## 7 Marking

Ballasts which form an integral part of the luminaire need not be marked. The requirements of 7.2 of IEC 61347-1 apply.

### 7.1 Mandatory markings

Ballasts, other than integral ballasts, shall be clearly and durably marked, in accordance with the requirements of 7.1 of IEC 61347-1, with the following mandatory markings:

- Items a), b), c), d), e), f), k) and l) of 7.1 of IEC 61347-1;
- for controllable ballasts, the control terminals shall be identified;
- output terminals shall be identified as such;
- the value of the ignition voltage (16), if it exceeds 1 500 V. Connections having this voltage shall be marked; for ballasts with an ignition voltage over 5 kV, this marking shall be a flash symbol, see IEC 60417-5036 (DB:2002-10);
- a declaration of the maximum working voltage (r.m.s.) according to 15.1 between
  - output terminals;
  - any output terminal and earth, if applicable.

The specification of each of these values shall be given in the manufacturer's description in steps of 10 V when the working voltage is equal to or less than 500 V, and in steps of 50 V when the working voltage is higher than 500 V.

The highest of the specified voltage values shall be marked on the ballast as "output working voltage = xx V" (or "U-OUT = xx V").

### 7.2 Information to be provided, if applicable

In addition to the above mandatory markings, the following information, if applicable, shall be given either on the ballast, if declared below, or be made available in the manufacturer's catalogue or the like.

Items h), i), j), m) and n) of 7.1 of IEC 61347-1 together with:

- in the case of a ballast consisting of more than one separate unit, all parts have to be marked such that the matching components can be identified clearly;
- warning to the installer to prevent overheating of ballasts and associated components in a multi ballast installation mounted in poles, boxes etc.;
- an indication of the time limitation of ignition voltage;
- If the control terminal is not basic insulated from the mains, this shall be indicated on the ballast.

## 8 Terminals

The requirements of Clause 8 of IEC 61347-1 apply.

## 9 Provisions for earthing

The requirements of Clause 9 of IEC 61347-1 apply.

## 10 Protection against accidental contact with live parts

The requirements of Clause 10 of IEC 61347-1 apply.

## 11 Moisture resistance and insulation

The requirements of Clause 11 of IEC 61347-1 apply.

## 12 Electric strength

The requirements of Clause 12 of IEC 61347-1 apply.

## 13 Thermal endurance test for windings

The requirements of Clause 13 of IEC 61347-1 do not apply.

## 14 Fault conditions

The requirements of Clause 14 of IEC 61347-1 apply.

## 15 Protection of associated components

Output voltages measured shall be those between all output terminals and any output terminal and earth.

**15.1** Under normal and abnormal operating conditions none of these output voltages shall exceed the working voltage as declared by the manufacturer. The ignition phase being defined by switch on or beginning of the ignition process up to the time limit as given in Clause 16 is exempted.

**15.2** Under normal and abnormal (see Clause 17) conditions, if a time limitation is declared for ignition, it shall not be exceeded.

**15.3** For controllable electronic ballasts, the control terminal shall be isolated from the mains circuit by an insulation at least equal to basic insulation unless otherwise indicated, see 7.2.

## 16 Ignition voltage

### 16.1 Instruments

Measurements are made by oscilloscope or electrostatic voltmeters for ignition voltages up to 100 kV.

NOTE A typical electrostatic voltmeter is prescribed in Figure 1 of IEC 61347-2-1.

Many electronic ballasts cannot have grounded outputs. In case a differential probe has to be used, it may have an impedance greater than 1 M $\Omega$  at up to 10 kHz. For higher frequencies  $f$  the probe must have an impedance  $Z$  greater than a 15 pF capacitor ( $C$ ) based on the equation

$$Z = 1/(2\pi f C)$$

The cut-off frequency should be  $\geq 30$  MHz at  $-3$ dB.

Above 15 kV a spherical spark gap can be used, using the procedure based on that given in IEC 60052, and taking note of Annex I.

In case of doubt, the measurement with the electrostatic voltmeter shall be the reference method.

### 16.2 Ignition voltage limits

The maximum value of the ignition voltage shall not exceed 5 kV when operated at the rated voltage and with a load capacitance of 20 pF (including the capacitance of the probe), or using the circuit shown in Figure 1 of IEC 61347-2-1 for either positive or negative pulses, taking into account however, the maximum ignition voltage specified in the relevant lamp data sheets.

If not otherwise stated on the relevant lamp data sheets, for electronic ballasts with ignition voltages over 5 kV, the maximum value shall not exceed  $1,3 \times U_p$  declared by the manufacturer when operated at the rated supply voltage and with a load capacitance of 20 pF.

NOTE In some countries, the ignition voltage is restricted to 4 kV.

### 16.3 Ignition time cut-out

Electronic ballasts equipped with cut-outs shall be of such a construction that, in the case of non-igniting lamps, the cut-out interrupts at least the production of the ignition voltage.

After the cut-out has interrupted the circuit, the generation of the ignition voltage is allowed either after disconnecting and reconnecting the ballast to the supply or by control signal.

Electronic ballasts with ignition voltages over 5 kV shall be provided with a cut-out for igniting. Time to cut-out is limited:

- for ignition voltages 5 to 10 kV to 60 s,
- for ignition voltages > 10 kV a) to 3 s, or  
b) to 30 s, if declared in the manufacturer's literature.

The cut-out time of 60 s for ignition voltage from 5 kV to 10 kV can be extended, depending on the lamp type, up to a period of 20 min within which the combined intervals of ignition attempts add up to 60 s, provided it is evident for the maintenance service staff that the controlgear is still trying to ignite.

## 17 Abnormal conditions

The ballast shall not impair safety when operated under abnormal conditions at any voltage between 90 % and 110 % of rated supply voltage. The range of rated supply voltage may be declared differently by the manufacturer.


*Compliance is checked by the following test.*

Each of the following conditions shall be applied with the ballast operating to the manufacturer's instructions (including a heat sink, if specified) for 1 h:

- a) lamp is not inserted or does not ignite;
- b) burner leaks;
- c) the lamp operates, but rectifies.

Condition a) is tested with open output.

Condition b) is tested with circuit in Figure 1 (see below).

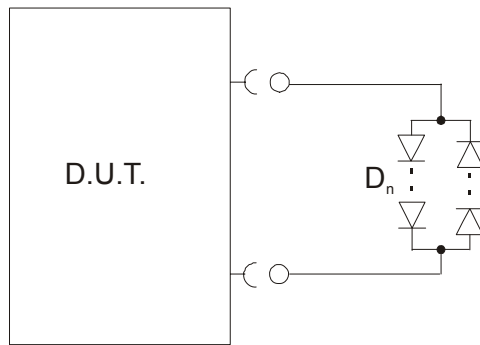

**Key**


D.U.T.: Device under test

$D_n$ : circuit of some diodes in series, and anti-parallel to them, the same number of diodes in series which yields a voltage of 10 V to 15 V across them.

**Figure 1 – Circuit to test whether a ballast can withstand a leaking burner**

Condition c) is tested with circuit in Figure 2 (see below).

Both current directions have to be checked: ballast terminal 1 with circuit wire 1 and ballast terminal 1 with circuit wire 2.

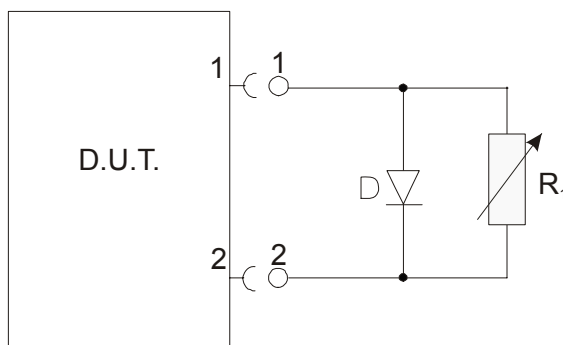

**Key**

D.U.T.: Device under test

D: 100 A, 600 V

R1: 0...200  $\Omega$  (wattage rating of the resistor to be at least 1/2 lamp wattage)

**Figure 2 – Circuit to test whether a ballast can withstand rectification**

*During and at the end of the tests specified under items a) to c), the ballast shall show no defect impairing safety nor shall any flame, molten material, flammable gases or smoke be produced.*

## **18 Construction**

The requirements given in Clause 15 of IEC 61347-1 apply.

## **19 Creepage distances and clearances**

The requirements given in Clause 16 of IEC 61347-1 apply.

## **20 Screws, current-carrying parts and connections**

The requirements given in Clause 17 of IEC 61347-1 apply.

## **21 Resistance to heat, fire and tracking**

The requirements given in Clause 18 of IEC 61347-1 apply.

## **22 Resistance to corrosion**

The requirements given in Clause 19 of IEC 61347-1 apply.

**Annex A**  
(normative)

**Test to establish whether a conductive part is a live part  
which may cause an electric shock**

The requirements of Annex A of IEC 61347-1 apply.

**Annex B**  
(normative)

**Particular requirements for thermally protected lamp controlgear**

The requirements of Annex B of IEC 61347-1 do not apply.

**Annex C**  
(normative)

**Particular requirements for electronic lamp controlgear  
with means of protection against overheating**

The requirements of Annex C of IEC 61347-1 apply.

**Annex D**  
(normative)

**Information for carrying out the heating tests  
of thermally protected lamp controlgear**

The requirements of Annex D of IEC 61347-1 apply.

**Annex E**  
(normative)

**The use of constants  $S$  other than 4 500 in  $t_w$  tests**

The requirements of Annex E of IEC 61347-1 do not apply.

**Annex F**  
(normative)

**Draught-proof enclosure**

The requirements of Annex F of IEC 61347-1 apply.

**Annex G**  
(normative)

**Explanation of the derivation of the values of pulse voltages**

The requirements of Annex G of IEC 61347-1 do not apply.

**Annex H**  
(normative)

**Tests**

The requirements of Annex H of IEC 61347-1 do not apply

## **Annex I** (normative)

### **Precautions to be observed when measuring with spherical spark gaps**

Because many electronic ballasts do not have outputs where one pole is at earth potential, the direct application of IEC 60052 cannot apply.

In all cases the following clauses shall be observed together with those requirements of IEC 60052 which are applicable.

#### **I.1 Spherical spark gap**

The sphere-gap (spherical spark gap) shall be greater than the anticipated breakdown distance and shall be progressively reduced until breakdown occurs (i.e. too small a gap opening up to non-sparking distance is not a valid method of determining the correct voltage value).

#### **I.2 Breakdown gap distance**

The breakdown gap distance shall be recorded and the 50 % peak voltage value determined from Table 2 in IEC 60052.

#### **I.3 Duty cycle of the electronic ballast**

The duty cycle of the electronic ballast shall be observed to ensure that overheating/failure of the components is not induced.

#### **I.4 End of test**

All safety precautions shall be observed and all voltages shall be discharged at the end of the test.

## Bibliography

IEC 60188, *High pressure mercury vapour lamps – Performance specifications*

NOTE Harmonized as EN 60188:2001 (not modified).

IEC 60192, *Low pressure sodium vapour lamps – Performance specifications*

NOTE Harmonized as EN 60192:2001 (not modified).

IEC 60662, *High pressure sodium vapour lamps*

NOTE Harmonized as EN 60662:1993 (not modified).

IEC 61167, *Metal halide lamps*

NOTE Harmonized as EN 61167:1994 (not modified).

---

**Annex ZA**  
(normative)**Normative references to international publications  
with their corresponding European publications**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE Where an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60052	2002	Voltage measurement by means of standard air gaps	EN 60052	2002
IEC 60417	database	Graphical symbols for use on equipment	-	-
IEC 61347-1	- 1)	Lamp controlgear Part 1: General and safety requirements	EN 61347-1 + corr. July	2001 2) 2003

---

1) Undated reference.

2) Valid edition at date of issue.



---

---

## BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.  
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.  
Fax: +44 (0)20 8996 7001. Email: [orders@bsi-global.com](mailto:orders@bsi-global.com). Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.  
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: [info@bsi-global.com](mailto:info@bsi-global.com).

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.  
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.  
Email: [membership@bsi-global.com](mailto:membership@bsi-global.com).

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.  
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.  
Email: [copyright@bsi-global.com](mailto:copyright@bsi-global.com).